

LED PANEL LIGHT



LED PANEL LIGHT

60x60 Panel



IP20
RATING




5 YEAR
WARRANTY

LED Panel Light

Our LED panels illuminate the room immediately, spreading light efficiently, with better quality of light.

This is a good alternative to grille lights and fluorescent tube grids in offices and commercial buildings.


Square 600x600mm panels are an ideal retrofit for fluorescent 2ft quad grids, 600x1200mm rectangular panels can replace fluorescent 4ft quads, 1200x300mm panels can replace fluorescent 4ft twins, and the Round LED Panels come in a variety of sizes to replace CFL



Partner with




Light distribution

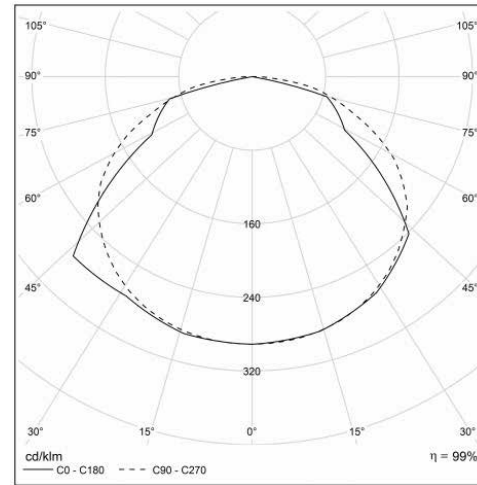

120D

Lamp size

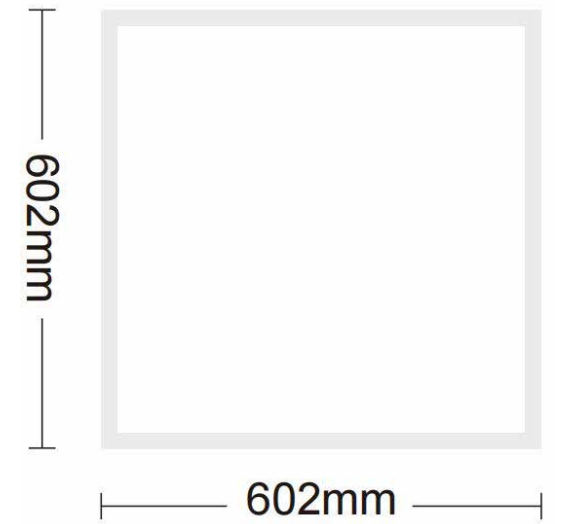

View of Edge-lit & Back-lit



Model	System Power	Lumen Output	CCT	Voltage	Size	Descriptions
60x60 Panel	30W	3600lm	35K 3500K 40K 4000K	100-277VAC	602x602mm	<ul style="list-style-type: none"> • Dimming available • Aluminum frame • PMMA cover • Emergency function optional if requires • 5 year warranty
	40W	4800lm	50K 5000K 5700K 57K			

Note:
The Brand of LED and Driver can be customized due to client's request
60x60, 120x60, 120x30 panel each has back-lit and edge-lit type
The feature of Emergency is not in standard specifications, please advice if the function is required.
We suggest choosing recommended light distributions unless you know how to select it for certain lighting application

LED PANEL LIGHT



120x60 Panel



IP20 RATING




5 YEAR WARRANTY

LED Panel Light

Our LED panels illuminate the room immediately, spreading light efficiently, with better quality of light.

This is a good alternative to grille lights and fluorescent tube grids in offices and commercial buildings.

Square 600x600mm panels are an ideal retrofit for fluorescent 2ft quad grids, 600x1200mm rectangular panels can replace fluorescent 4ft quads, 1200x300mm panels can replace fluorescent 4ft twins, and the Round LED Panels come in a variety of sizes to replace CFL




Partner with



LED PANEL LIGHT

Light distribution

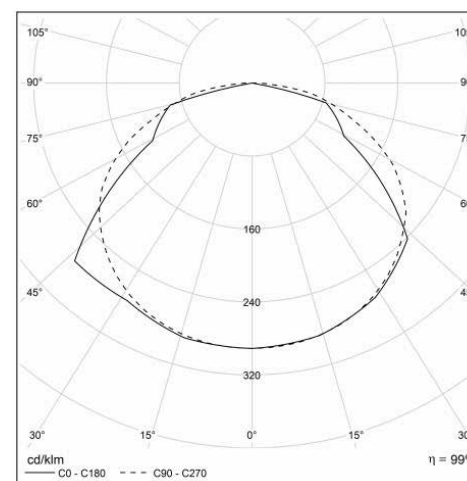

120D

Lamp size



View of Edge-lit & Back-lit



Model	System Power	Lumen Output	CCT	Voltage	Size	Descriptions
120x60 Panel	30W	3600lm	35K 3500K	100-277VAC	1209x602mm	<ul style="list-style-type: none"> • Dimming available • Aluminum frame • PMMA cover • Emergency function optional if requires • 5 year warranty
	40W	4800lm	40K 4000K			
	50W	6000lm	50K 5000K			
			5700K 57K			

Note:
The Brand of LED and Driver can be customized due to client's request
60x60, 120x60, 120x30 panel each has back-lit and edge-lit type
The feature of Emergency is not in standard specifications, please advice if the function is required.
We suggest choosing recommended light distributions unless you know how to select it for certain lighting application

LED PANEL LIGHT



120x30



IP20 RATING



5 YEAR WARRANTY

LED Panel Light

Our LED panels illuminate the room immediately, spreading light efficiently, with better quality of light.

This is a good alternative to grille lights and fluorescent tube grids in offices and commercial buildings.

Square 600x600mm panels are an ideal retrofit for fluorescent 2ft quad grids, 600x1200mm rectangular panels can replace fluorescent 4ft quads, 1200x300mm panels can replace fluorescent 4ft twins, and the Round LED Panels come in a variety of sizes to replace CFL




Partner with



LED PANEL LIGHT

Light distribution

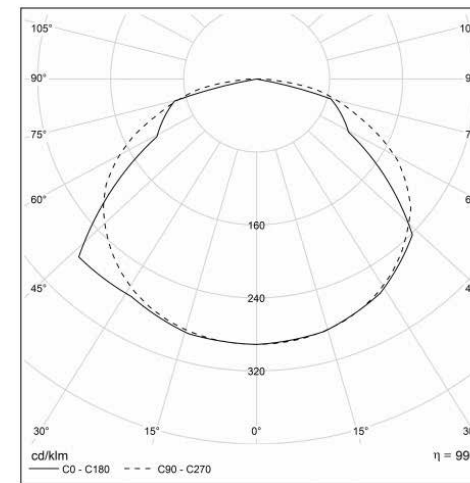

120D

Lamp size



View of Edge-lit & Back-lit



Model	System Power	Lumen Output	CCT	Voltage	Size	Descriptions
120x30 Panel	30W	3600lm	35K 3500K 40K 4000K	100-277VAC	1209x298mm	<ul style="list-style-type: none"> • Dimming available • Aluminum frame • PMMA cover • Emergency function optional if requires • 5 year warranty
	40W	4800lm	50K 5000K 5700K 57K			

Note:

The Brand of LED and Driver can be customized due to client's request
60x60, 120x60, 120x30 panel each has back-lit and edge-lit type

The feature of Emergency is not in standard specifications, please advice if the function is required.

We suggest choosing recommended light distributions unless you know how to select it for certain lighting application